

LED strip lights

Multi-white, 8 mm



Häfele Loox5 LED 2073 / 2076; Standard



LED 2073



LED 2076

Optimised light mixture

- > Cool white and warm white LEDs in the smallest of spaces
- > Optimal light mixture without flickering

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 8 mm
- > Height: 1.3 mm
- > Life time L80/B10: >30,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

! Order reference:
Please order lead separately.

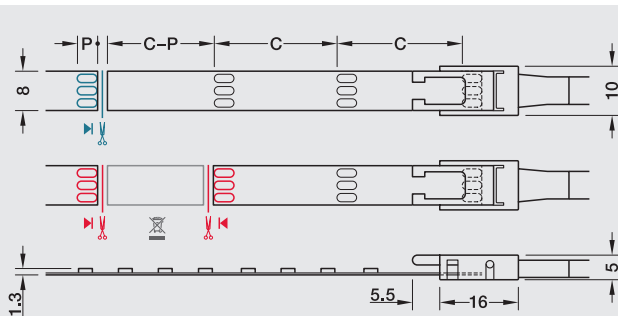
Illuminance value in lx applies to 1 m strip length:

2700 K		5000 K		120°	
1025 lx	1075 lx	☀️		250 mm	
425 lx	445 lx	☀️		500 mm	
230 lx	245 lx	☀️		750 mm	
145 lx	150 lx	☀️		1000 mm	

LED 2073

2700 K		5000 K		120°	
2040 lx	2110 lx	☀️		250 mm	
850 lx	875 lx	☀️		500 mm	
460 lx	470 lx	☀️		750 mm	
280 lx	290 lx	☀️		1000 mm	

LED 2076



- Cut LED strip light to length (one contact side remains on the remainder piece; reusable)
- Connect LED strip lights (two contact sides required)





C = section length
P = length of contact surface



Häfele Loox5 LED 2073 / 2076; Standard

Voltage	Quantity	Colour temperature	Wattage	Luminous flux	Luminous efficacy	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C	Length of contact surface P	Max. strip length (visual)	Available length
						R _a	R ₉					
V	LEDs/m	K	W/m	lm/m	lm/W	R _a	R ₉		mm	mm	m	5 m
5 12V	Häfele Loox5 LED 2073											
	2 x 60	2700 5000	4.8	425 465	88 96	90	>50	5.28	50	4	4.5	833.74.316
	Häfele Loox5 LED 2076											
	2 x 120	2700 5000	9.6	875 940	91 97	90	>50	10.56	25	3.5	3	833.74.318

! Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.

 <p>> 3.5 A/20 AWG lead for 8 mm multi-white LED strip light</p> <table border="1"> <tr> <th>Length mm</th> <th>Cat. No.</th> </tr> <tr> <td>500</td> <td>833.72.717</td> </tr> </table>	Length mm	Cat. No.	500	833.72.717	 <p>> 3.5 A clip connector for 8 mm multi-white LED strip light</p> <table border="1"> <tr> <th>Cat. No.</th> </tr> <tr> <td>Clip connector</td> </tr> <tr> <td>833.89.208</td> </tr> </table>	Cat. No.	Clip connector	833.89.208
Length mm	Cat. No.							
500	833.72.717							
Cat. No.								
Clip connector								
833.89.208								
 <p>> Corner connector 90° rigid, 3.5 A for left or right for 8 mm multi-white LED strip light</p> <table border="1"> <tr> <th>Cat. No.</th> </tr> <tr> <td>Corner connector rigid</td> </tr> <tr> <td>833.89.188</td> </tr> </table>	Cat. No.	Corner connector rigid	833.89.188	 <p>> 3.5 A/20 AWG interconnecting lead for 8 mm multi-white LED strip light</p> <table border="1"> <tr> <th>Length mm</th> <th>Cat. No.</th> </tr> <tr> <td>500</td> <td>833.89.198</td> </tr> </table>	Length mm	Cat. No.	500	833.89.198
Cat. No.								
Corner connector rigid								
833.89.188								
Length mm	Cat. No.							
500	833.89.198							

+ Use Häfele BLE Box to operate the multi-white strip lights. See page 88